

## CH S6-90

### THE SYNCHROMESH 6 SPEED TRANSMISSION FOR TRUCKS & BUSES

#### Features:

##### GEAR SELECTIONS:

All forward speed is synchro-locked, reverse by means of dog clutch.


##### OPERATION OF GEAR CHANGING:

Remote gear change by a turning shaft control system or lateral control gear change.

(The connection of the turning shaft control system is adaptable to the mounting conditions of the vehicle).

##### CLUTCH STANDARD:

They can also be supplied with a clutch bell (SAE 1 or according to SAE J617 & J618) and a connecting feature for a retarder brake.

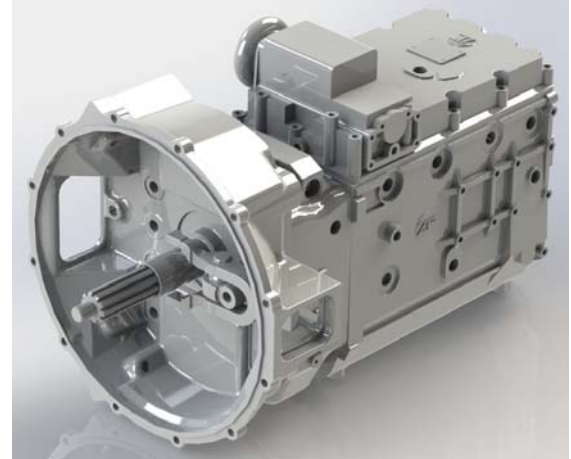

#### Technical specifications:

Transmission	Input torque	Ratio spread	No. of gears	Installation Dimensions	Oil Capacity	Mass/ Weight*
1268 007 705	1000	9.01-1.00; R8.30	6	905	13	240
1268 007 707	1200	6.98-1.00; R6.43	6	940	13	245

#### Installation dimensions:

Gearbox can be supplied with remote gear shifting system (cable) or direct shifting system.

